

E35 Bi-Color Recessed light

LME0749-DFW2A-xx

Dimensioned drawing

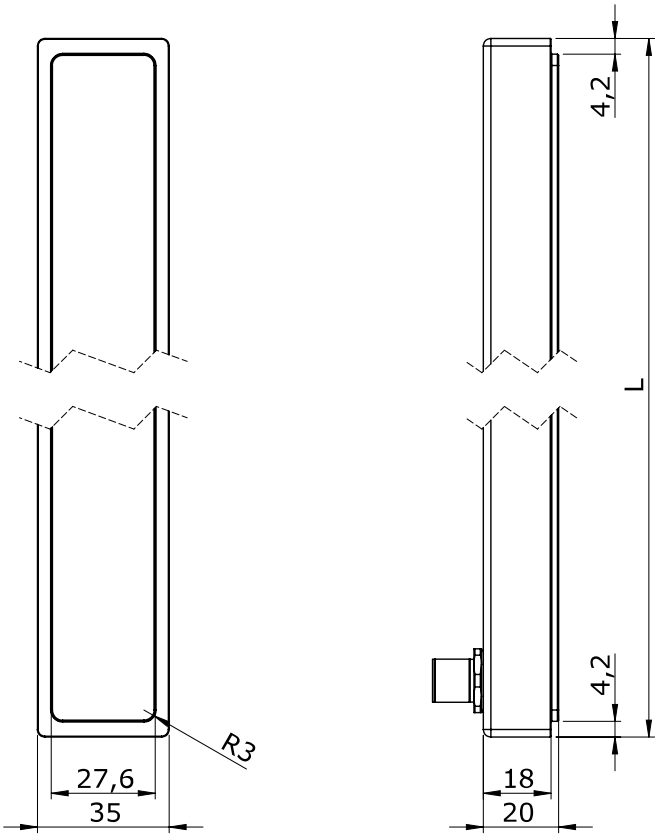

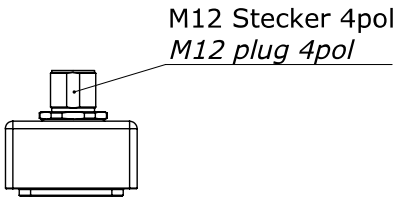

Downloads

Download STEP-File:
https://api.diana-leuchten.de/uploads/M_LME_0749_xx_W2_A_8ba55711ea.STEP

Download 3D-PDF:
https://api.diana-leuchten.de/uploads/M_LME_0749_xx_W2_A_5160a6c0bc.PDF

Mounting

To fix the light, there is a shoulder on the front of the light to fix the light in a sheet with appropriate cutout. Size of the cutout: 411,9x28,1 mm, Radius 3 mm

Technical details

Operating voltage	22-28 VDC
Power	20 W
Connection	M12 stainless steel plug
Protection	IP68
Protection class	III
Risk group	0
Length (L)	420 mm
Material	tempered float glass, anodized aluminum
Beam angle	120° diffuse
Light color	2 light colors (red, blue, green, amber, white)
UL	Yes
IO-Link	No

Based on complex manufacturing process of LEDs typical values of technical LED-parameters as stated above are only statistical values, which do not comply necessarily with real technical parameters of each single product. Measurement of the light color white according to EN 62471:2008 at standard distance (illuminance = 500 lx). The risk group may vary depending on light color and application. Detailed information and measurement results are available on request.

Safety note

LED Lighting Systems are able to generate very intense radiation, which can damage eyes by inappropriate use. The LED lights may only be used in accordance with the technical data and safety regulations. The safety and installation notes refer to the whole life cycle of the LED light. In-house regulations and relevant regulations valid for the country of use must be observed. If basically safety and warning requirements are ignored, there is a danger of personal injuries and property damages. We are not liable for any damage resulting from these cases.

• Use the light in perfect technical condition. Perform a professional assembly and electrical connection. • Installation of the LED light only by qualified staff. • The light is designed for a voltage of 24 VDC and should never be operated at other voltage. • Before working on the light, disconnect the power supply. • The light cannot be opened. Unauthorized modifications of the light are prohibited. • The light is fixed with the corresponding fixing elements (available as accessories).

The suitability of the product for the intended purpose of use has to be checked by the customer.

Care instructions

Before cleaning the light, it must be disconnected from the power supply. If the light is dirty, it can be cleaned with a damp cloth and rubbing alcohol. Restart the light only, when there is no moisture on it. If the LED light fails, it must be checked by the manufacturer and repaired if necessary.


E35 Bi-Color Recessed light

LME0749-DFW2A-xx

Disposal information

This product is covered by WEEE Directive 2012/19/EU on waste electrical and electronic equipment. Dispose of the product properly and not as part of the domestic waste. The regulations of the respective country are to be observed. Information is provided by the national authorities.

Electrical connection



input (M12 plug, 4-pin)

PIN 1	brown	+24V
PIN 2	white	DIM 0-10V (max. 10mA)
PIN 3	blue	GND
PIN 4	black	color change +24V (10mA)

Light supply voltage is 24 VDC. By applying +24V to PIN4, the light color of the light can be changed. The light output of the light can be adjusted in the range 0-100% via a control signal (DIM). For this purpose, a voltage of 0-10 V is applied to the control input PIN2. With +10 V the light provides the maximum light output, with 0 V the light is off.

Note

To get enough cooling power for the light, it is necessary to mount it on a metal surface.

c UL us LISTED
LOW VOLTAGE LUMINAIRE
E503650